


RELIEF VALVE (HR3H) SIZE 025 / 03 / 06

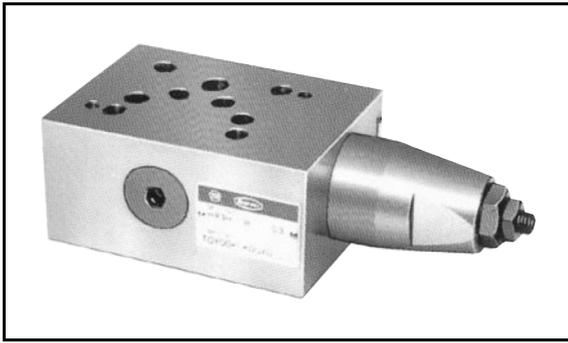


SPECIFICATIONS


| Controlled Port | Structure Category | Model | Max. Operating Pressure (MPa) | Rated Flow (L/min) | Max. Flow (L/min) | Symbol | Pressure Adjustment Range (MPa) |
|-----------------|-----------------------|----------------|-------------------------------|--------------------|-------------------|--------|---|
| P | Balancing Piston Type | HR3H-P-B*-025B | 25 | 20 | 40 | | [Balancing piston type] Size 025 * symbol 1: 0.7 to 7 2: 3.5 to 14 3: 10.5 to 25 |
| | | HR3H-P-B*-03 | | | | | 21 |
| | | HR3H-P-B*-06 | 120 | 190 | | | |
| A | Direct Type | HR3H-A-D*-025B | 25 | 12 (NOTE) | 40 | | [Direct type] Size 025 4: 0.7 to 7 5: 3.5 to 14 6: 10.5 to 25 |
| | | HR3H-A-D*-03 | 21 | 12 (NOTE) | 80 | | |
| B | | HR3H-B-D*-025B | 25 | 12 (NOTE) | 40 | | |
| | | HR3H-B-D*-03 | 21 | 12 (NOTE) | 80 | | |

NOTE: The rated flow value 12 L/min is the recommended relief flow.

EXTERNAL DIMENSIONS

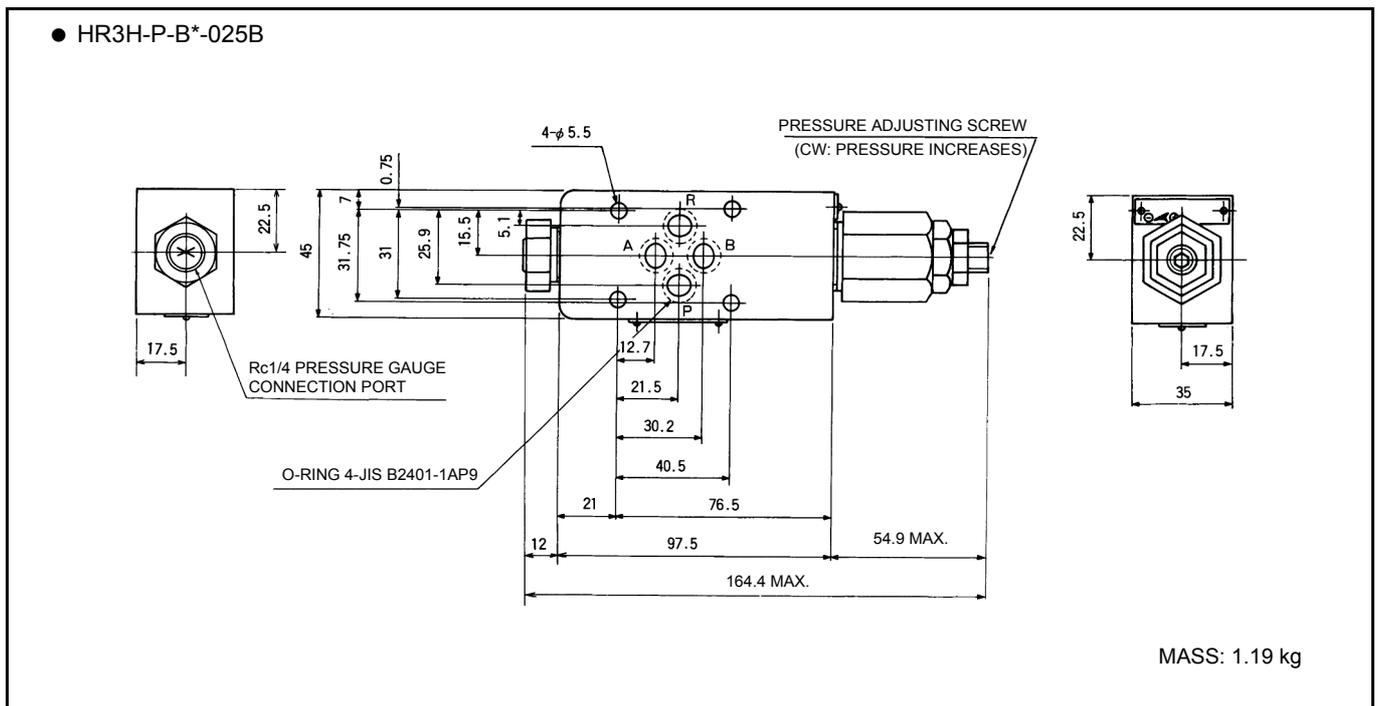

● HR3H-P-B*-06

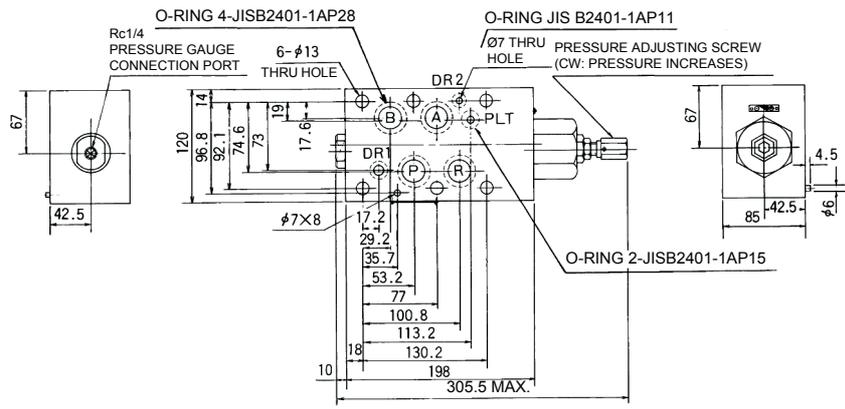

MASS: 13.2 kg